

basics

This is a basic downlight version 2 brochure

Introducing version 2 of M-Elec's popular basic downlight range; featuring a new and improved built-in dimming driver.

This year, M-Elec expands the BSD range to offer new BSD9 in your choice of flush or recess face, and standard flex or Rapid® connector options. M-Elec's unique Rapid® connector is a universal polarity tool-less installation system designed to minimise labour costs.


Suitable for use with 1.5mm² and 2.5mm² 2C+E ONLY WITH CENTRE EARTH cables in accordance with AS/NZS 5000.2:2600 conductor range.



This one is
7W 72mm

These are
9W 90mm

This one is
12W 120mm

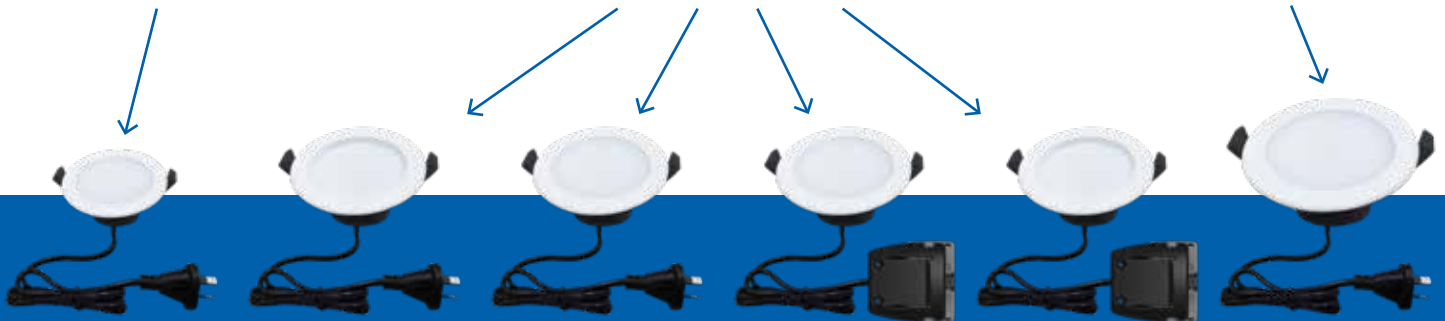

ML-BSD7-V2-MULTI
Flush face with
600mm flex

ML-BSD9-V2-M-RF
Recessed face with
600mm flex

ML-BSD9-V2-MULTI
Flush face with
600mm flex

ML-BSD9-V2-M-RAPID
Flush face with
Rapid® Connector

ML-BSD9-V2-M-RF-RAPID
Recessed face with
Rapid® Connector

ML-BSD12-V2-MULTI
Flush face with
600mm flex

We haven't wasted any time or money on fancy names, packaging or surplus features. These are fully functioning downlights at the best price possible.

