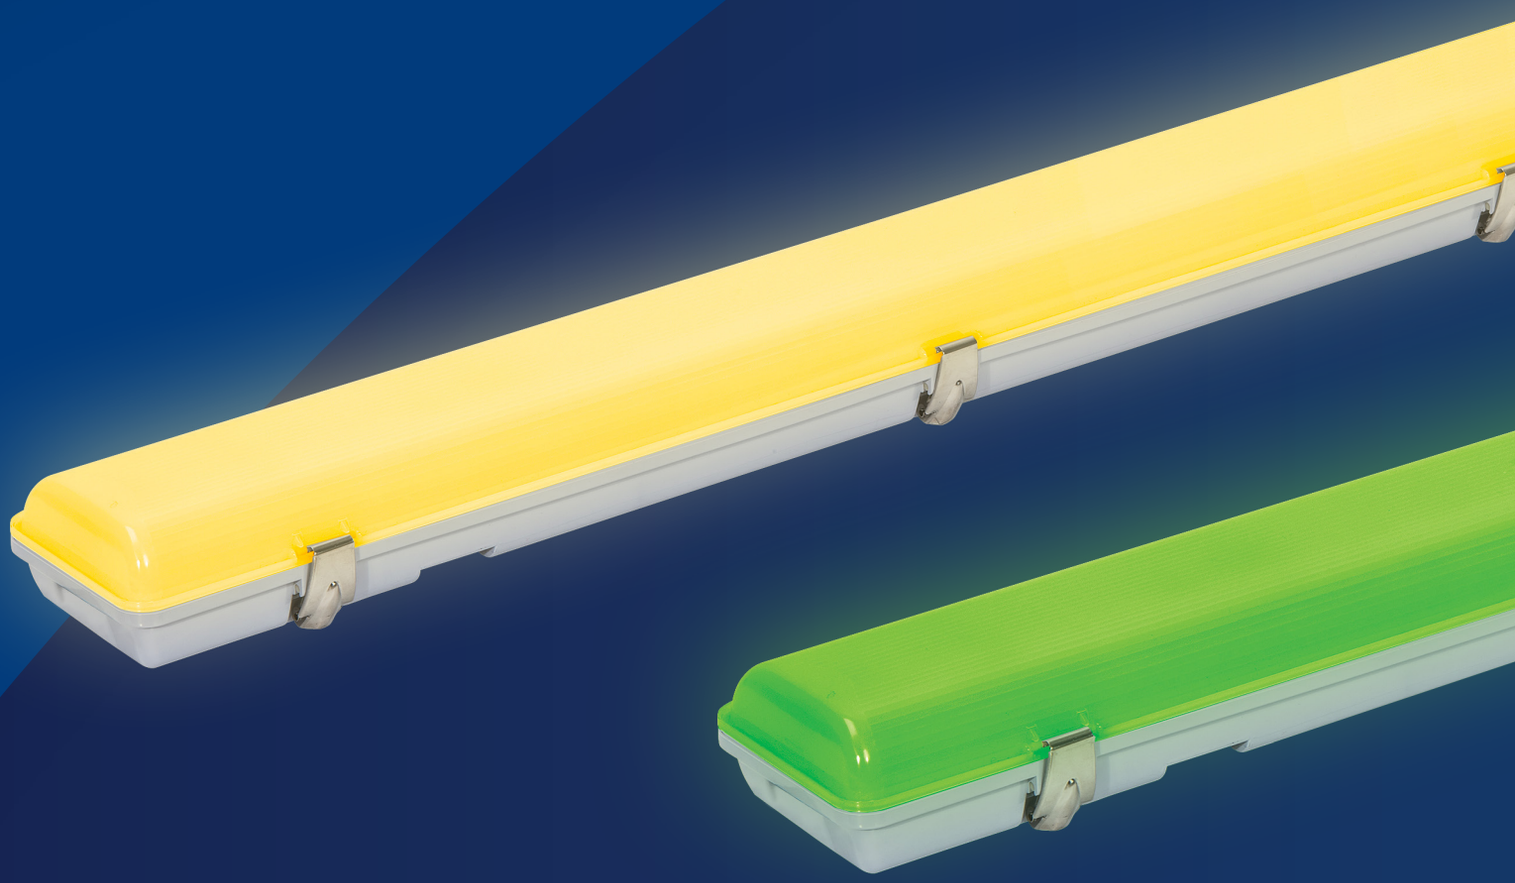

TITAN X4

20W & 40W Weather Protected Yellow or Green LED Battens

- **WIDE BODY**
- **EMERGENCY OPTION**
- **BACK ENTRY**

T. 1300 222 445 | www.melec.com.au

TITAN X4

20W & 40W Weather Protected Yellow or Green LED Battens

5 year warranty

1 year for EM battery

TITANX4 FEATURES

Multiple back entry points
Large terminal block
New extended hanging retainers
EASY INSTALLATION

New design with wide body
GREAT FOR RETRO FITS

Weather protected
PERFECT FOR OUTDOORS

50,000** hours
NEW LONGER LIFE

Stainless steel brackets & clips
with pre-made screw points***
& IK10 impact rating for
VANDAL PROTECTION

Quick release PCB
NO TOOLS REQUIRED

Tough polycarbonate opaque diffuser
UNIFORM LIGHT DISTRIBUTION

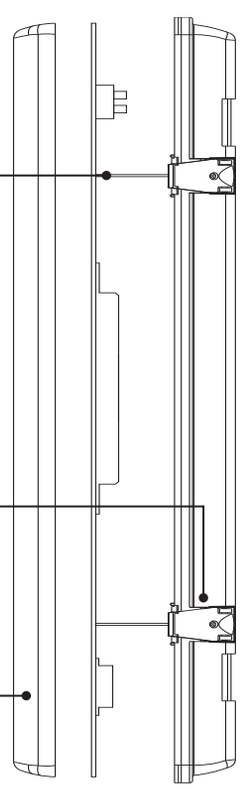

ABOUT TITANX4

The TITAN X4 meets the electricians demands with yellow or green outputs, wide body, multiple back entry points and vandal guard clips.

With the gear tray holding all components, having a large terminal block and Tridonic driver the 4th series of the TITAN range will ensure efficient installation and is covered with a 5 year warranty (1 year on the emergency battery).

20W

Weather Protected Yellow or Green LED Batten



AVAILABLE TO ORDER	IN STOCK	IN STOCK	AVAILABLE TO ORDER
20W Green Model ML-TN20X4-G	20W Yellow Model ML-TN20X4-Y	20W Green & Emergency Kit ML-TN20X4-G-EM	20W Yellow & Emergency Kit ML-TN20X4-Y-EM

40W

Weather Protected Yellow or Green LED Batten



AVAILABLE TO ORDER	IN STOCK	AVAILABLE TO ORDER	AVAILABLE TO ORDER
40W Green Model ML-TN40X4-G	40W Yellow Model ML-TN40X4-Y	40W Green & Emergency Kit ML-TN40X4-G-EM	40W Yellow & Emergency Kit ML-TN40X4-Y-EM

20W STANDARD MODEL

AVAILABLE TO ORDER

ML-TN20X4-G

TOTAL POWER	18W*
LUMEN OUTPUT	1766lm
COLOUR TEMPERATURE	520-530NM
IP RATING	IP65
EFFICACY	98lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	650 x 117 x 70mm
COMPLIANCE	SAA, C-TICK

20W EMERGENCY KIT

IN STOCK

ML-TN20X4-G-EM

*Emergency battery has 1 year warranty

TOTAL POWER	19W*
LUMEN OUTPUT	1780lm
COLOUR TEMPERATURE	520-530NM
IP RATING	IP65
EFFICACY	93lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	650 x 117 x 70mm
COMPLIANCE	SAA, C-TICK, AS2293
EM CLASSIFICATION	C_0 D40, C_{90} D25

40W STANDARD MODEL

AVAILABLE TO ORDER

ML-TN40X4-G

TOTAL POWER	37W*
LUMEN OUTPUT	3770lm
COLOUR TEMPERATURE	520-530NM
IP RATING	IP65
EFFICACY	102lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	1250x117x70mm
COMPLIANCE	SAA, C-TICK

40W EMERGENCY KIT

AVAILABLE TO ORDER

ML-TN40X4-G-EM

*Emergency battery has 1 year warranty

TOTAL POWER	40W*
LUMEN OUTPUT	3780lm
COLOUR TEMPERATURE	520-530NM
IP RATING	IP65
EFFICACY	95lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years (1 year for EM battery)
SIZE	1250x117x70mm
COMPLIANCE	SAA, C-TICK, AS2293
EM CLASSIFICATION	C_0 D40, C_{90} D25

*Total power consumed including driver, ** Average life is calculated on expected average lifespan,
***Anti tamper screws need to be purchased separatly

20W STANDARD MODEL

IN STOCK

ML-TN20X4-Y

20W | 50K HRS | BEAM | 5 YEARS WARRANTY

TOTAL POWER	20W*
LUMEN OUTPUT	2191lm
COLOUR TEMPERATURE	580-590NM
IP RATING	IP65
EFFICACY	110lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	650x117x70mm
COMPLIANCE	SAA, C-TICK

20W EMERGENCY KIT

AVAILABLE TO ORDER

ML-TN20X4-Y-EM

20W | 50K HRS | BEAM | 5 YEARS WARRANTY

*Emergency battery has 1 year warranty

TOTAL POWER	23W*
LUMEN OUTPUT	2107lm
COLOUR TEMPERATURE	580-590NM
IP RATING	IP65
EFFICACY	92lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	650 x 117 x 70mm
COMPLIANCE	SAA, C-TICK, AS2293
EM CLASSIFICATION	C_0 D40, C_{90} D25

40W STANDARD MODEL

IN STOCK

ML-TN40X4-Y

40W | 50K HRS | BEAM | 5 YEARS WARRANTY

TOTAL POWER	39W*
LUMEN OUTPUT	4468lm
COLOUR TEMPERATURE	580-590NM
IP RATING	IP65
EFFICACY	115lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years
SIZE	1250x117x70mm
COMPLIANCE	SAA, C-TICK

40W EMERGENCY KIT

AVAILABLE TO ORDER

ML-TN40X4-Y-EM

40W | 50K HRS | BEAM | 5 YEARS WARRANTY

*Emergency battery has 1 year warranty

TOTAL POWER	42W*
LUMEN OUTPUT	4476lm
COLOUR TEMPERATURE	580-590NM
IP RATING	IP65
EFFICACY	107lm/W
BEAM ANGLE	120°
DIMMABLE	No
POWER SUPPLY	220-240V 50/60Hz, U-OUT=60V, Tridonic Driver
AVERAGE LIFE	50,000 hrs**
MATERIALS	PC Body + OPAL PC Cove
OPERATING TEMP	-20° to +50°C
IK RATING	IK10
WARRANTY	5 years (1 year for EM battery)
SIZE	1250x117x70mm
COMPLIANCE	SAA, C-TICK, AS2293
EM CLASSIFICATION	C_0 D40, C_{90} D25

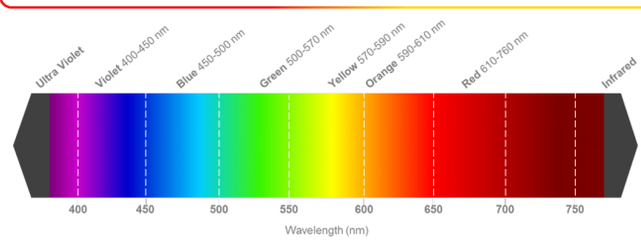

*Total power consumed including driver, ** Average life is calculated on expected average lifespan