LED SPOTLIGHT

ML-SPOTS-BL | ML-SPOTS-WH

INCLUDED IN THE BOX

1x LED spotlight with single head,
1x wall mounting kit, 1x user guide

TECHNICAL DETAILS

Total power consumed: 13W
Lumen output: 1120lm
Colour temperature: 5700K
IP rating: IP65
Dimmable: No
Beam angle: 90°
Gimble angle: H 300°, V 145°
Input voltage: AC 85-265V, 50-60Hz
Average life: 40,000 hrs
Operating temperature: -20°C to +45°C
Warranty: 2 years
Weight: 0.7 kg
Size: Lamp Ø76mm | Base Ø133mm

INSTALLATION INSTRUCTIONS

Disconnect mains before proceeding.

Remove lamp and accessory kit from the box.

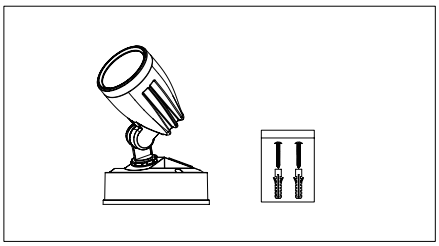

Unscrew and remove the base cover on the bottom of the fitting.

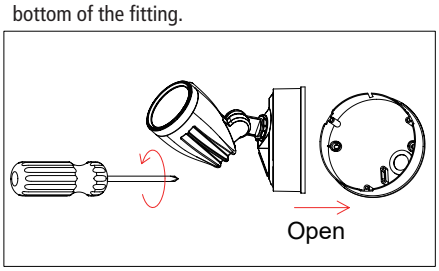

Mount the screw anchors onto the required location, matching the holes in the lamp base cover.

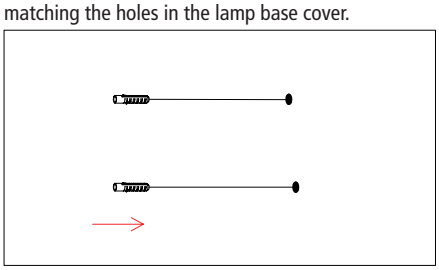

Mount the base cover using suitable screws to the required location.

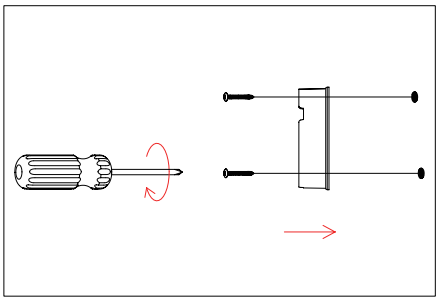

Wire up the new LED spotlight in accordance with marked terminals.

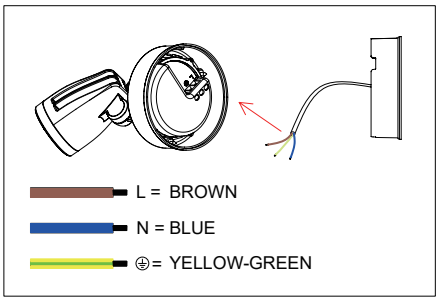

Fasten the fitting back to the lamp base cover. Restore the power and test the LED spotlight.

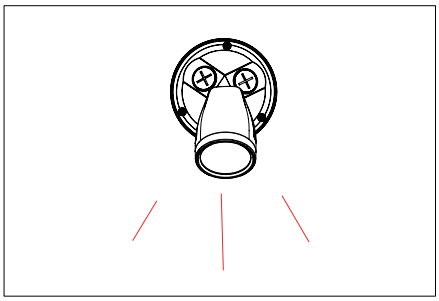

PLEASE NOTE

- MUST BE INSTALLED BY LICENCED ELECTRICIAN
- All components must not be mechanically stressed.
- Caution – do not use more than 6.0 kgf.cm torsion when fastening terminals. Too much force will damage the terminals and components.
- Light fitting can only be installed onto flat surface. Gimble angle is 300 ° Max.
- Follow all relevant electrical and safety standards (including AS3000)
- Correct electrical polarity must be observed as the wrong polarity may destroy the product and is not covered under warranty
- Damaged by corrosion will not be honoured as a material defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture, condensation and other harmful elements.
- M-Elec will not be held responsible for any incorrect installations or problems occurring due to poor installations.

For further information please visit **www.melec.com.au** or call us on 07 5438 8535

AUSBUY AUSTRALIAN OWNED

A family owned Australian business

N5577

Find us on Facebook
www.facebook.com/M.ElecLED